

HEAT-RESISTING STEELS

Available Product Variants

Plates

Product Description

Ferritic chromium-steel with additions of aluminium, good machineability and high temperature strength as well as scale resistant up to 800°C. Corrosion resistant in hot oxidizing and sulfuric gases and resistant to carburization. Furnace constrution and heat treatment shops.

Applications

> Components for Chemical plants (incl. LNG, FGD, Urea, LDPE, etc.)

> Other Oil and Gas + CPI components

> Tubular Products, Flanges, Fittings

Technical data


Ma	aterial designation		Standards	
	1.4713	SEL	10088-	
	X10CrAlSi7	EN	1009	EN ISO


Chemical composition (wt. %)

С	Si	Mn	Cr	AI
≤ 0,12	0,50 - 1,00	1	6,00 - 8,00	0,50 - 1,00





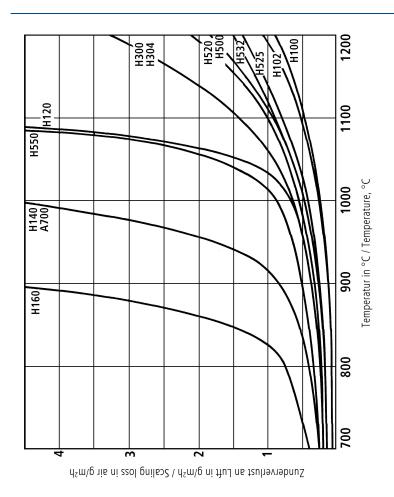

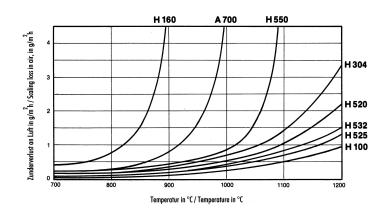





If other available product variants are listed in addition to long products, please note that these may differ in terms of melting process, technical data, delivery and surface condition as well as available product dimensions. For mandatory technical specifications, other requirements and dimensions, please contact our regional voestalpine BÖHLER sales companies. The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.

voestalpine BÖHLER Edelstahl GmbH & Co KG

Mariazeller Straße 25 8605 Kapfenberg, AT T. +43/50304/20-0 E. info@bohler-edelstahl.at https://www.voestalpine.com/bohler-edelstahl/de/

H160 EN_US - 05.2025

