

# COLD WORK TOOL STEELS

## Application Segments

Cold Work

## Available Product Variants

Long Products\*

Plates

\* Presented data refer exclusively to long products. Please observe the detailed explanations at the end of the data sheet (pdf).

## Product Description

BÖHLER K340 ECOSTAR belongs to the group of conventionally produced 8% chromium steels. Compared to conventional 12% chromium steels, this conventionally smelted tool steel has better toughness, hardening response and higher adhesive wear resistance. This combination of high adhesive wear resistance and toughness also offers advantages for industrial knives subject to high stress. This grade is also used for stamping and cutting tools.

## Process Melting

Airmelted

## Properties

- > Compressive strength : good
- > Dimensional stability : good

## Applications

- > Machine knife (for producers)
- > Coining
- > Screws and Barrels
- > Thread rolling
- > Rolling
- > Fine Blanking, Stamping, Blanking
- > Wear parts
- > Cold Forming
- > Powder Pressing
- > General Components for Mechanical Engineering

## Chemical composition (wt. %)

C	Si	Mn	Cr	Mo	V	Others
1.10	0.70	0.40	8.20	2.10	0.50	+Al, Nb

## Material characteristics

	Compressive strength	Dimensional stability during heat treatment	Toughness	Wear resistance abrasive	Wear resistance adhesive
<b>BÖHLER K340</b> ISODUR	★★★	★★★★★	★★★	★★★	★★★★★
<b>BÖHLER K340</b> ECOSTAR	★★★	★★★	★★	★★	★★
<b>BÖHLER K100</b>	★★	★★	★	★★★	★★
<b>BÖHLER K105</b>	★★	★★	★	★★	★★
<b>BÖHLER K107</b>	★★	★★	★	★★★	★★
<b>BÖHLER K110</b>	★★	★★★	★	★★★	★★
<b>BÖHLER K190</b> MICROCLEAN	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★
<b>BÖHLER K294</b> MICROCLEAN	★★★★★	★★★★★	★★★	★★★★★	★★★★★
<b>BÖHLER K360</b> ISODUR	★★★	★★★★★	★★★	★★★★★	★★★★★
<b>BÖHLER K346</b>	★★★	★★★	★★★	★★★★★	★★
<b>BÖHLER K353</b>	★★	★★★	★★	★★	★★
<b>BÖHLER K390</b> MICROCLEAN	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★
<b>BÖHLER K490</b> MICROCLEAN	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★
<b>BÖHLER K497</b> MICROCLEAN	★★★★★	★★★★★	★★★	★★★★★	★★★★★
<b>BÖHLER K888</b> MATRIX	★★★★★	★★★★★	★★★★★	★★	★★
<b>BÖHLER K890</b> MICROCLEAN	★★★★★	★★★★★	★★★★★	★★★	★★★

## Delivery condition

### Annealed

Hardness (HB)	max. 235
---------------	----------

## Heat treatment


### Stress relieving

Temperature	650 °C	After through heating, hold in neutral atmosphere for 1-2 hours.    Slow cooling in furnace    Intended to relieve stresses caused by extensive machining or in complex shapes.
-------------	--------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


### Hardening and Tempering

Temperature	1,020 to 1,060 °C	Quenching: Oil, salt bath, compressed air, air, gas.    Holding time after temperature equalization: 15 to 30 minutes.    After hardening, tempering to the desired working hardness according to the tempering chart.
-------------	-------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


## Tempering chart

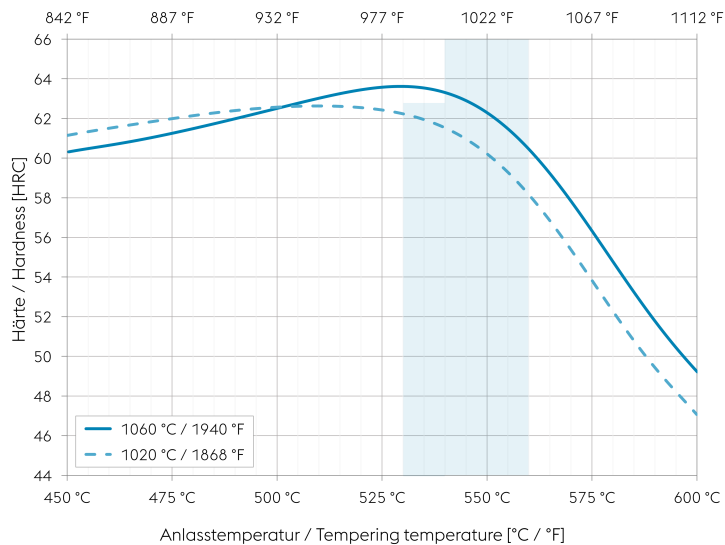

## Continuous cooling CCT curves

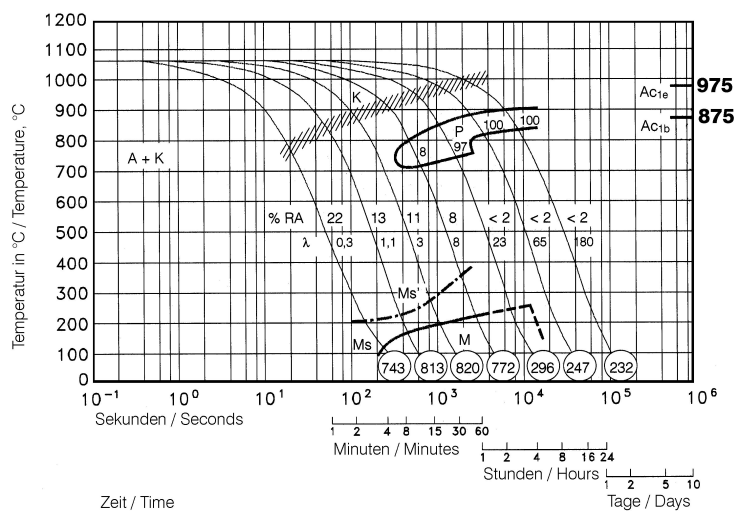

## Quantitative phase diagram

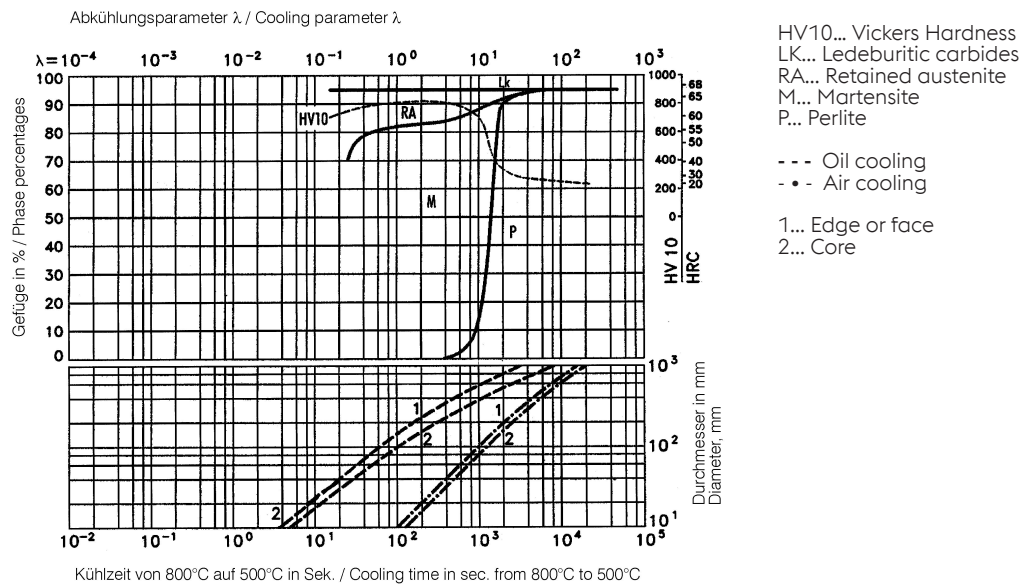

## Physical Properties

Temperature (°C)	20
Density (kg/dm <sup>3</sup> )	7.68
Thermal conductivity (W/(m.K))	17.8
Specific heat (kJ/kg K)	0.49
Spec. electrical resistance (Ohm.mm <sup>2</sup> /m)	0.64
Modulus of elasticity (10 <sup>3</sup> N/mm <sup>2</sup> )	206

## Thermal Expansions between 20°C | 68°F and ...

Temperature (°C)	100	200	300	400	500	600	700
Thermal expansion (10 <sup>-6</sup> m/(m.K))	11.2	11.8	12.3	12.7	12.9	13.1	13.1

If other available product variants are listed in addition to long products, please note that these may differ in terms of melting process, technical data, delivery and surface condition as well as available product dimensions. For mandatory technical specifications, other requirements and dimensions, please contact our regional voestalpine BÖHLER sales companies. The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.

voestalpine BÖHLER Edelstahl GmbH & Co KG  
 Mariazeller Straße 25  
 8605 Kapfenberg, AT  
 T. +43/50304/20-0  
 E. info@boehler-edelstahl.at  
<https://www.voestalpine.com/boehler-edelstahl/de/>

voestalpine

ONE STEP AHEAD.